



Full Strap
Advanced Strapping Systems

Magazine

Strapping Machine

TP-702MGZ

Fully Automatic Magazine Strapping Machine

TP-702MGZ is a high speed fully automatic strapping machine, designed specifically for the strapping of **magazine** and other printed media. With its advanced and precise bundle control, TP-702MGZ can be well adapted to stacker and **ensures bundle integrity**.




TP-702MGZ

Fully Automatic Magazine Strapping Machine

Main Features

➤ **Precise Bundle Control**

Automatic 4-side bundle squaring and multi-belt tabletop design provides precise bundle handling for a wide range of bundles from 130 mm wide through 330 mm wide. It secures the integrity of bundles and meets the demands of variable applications (magazine, zip sorted bundle, digest, tabloid, etc.)



➤ **Easy access to strapping head (patents registered)**


The whole strapping head can be completely pulled out during production. With this most user friendly design, operators can perform maintenance without pulling out the machine from the production line.



- Robust & compact mechanical strapping head with the latest DC brushless motor technology
- **Automatic tension control for various bundle dimensions (patents registered)**
- **Siemens PLC control and touch panel**
- Light tree alarm, dual lamp
- **Free access to strap guides (patents registered)**
- Automatic end-strap detection and ejection
- Adjustable table height between 800 mm and 900 mm
- **Very low minimum strap tension, 1 kg only**
- Fast, tool-less bundle size change

Options

- Energy saving transit with auto sleep mode
- Operator friendly low strap sensor (triple lamp)
- Low volume bundle bypass
- Lower adjustable table height with movable casters (730 mm – 830 mm)

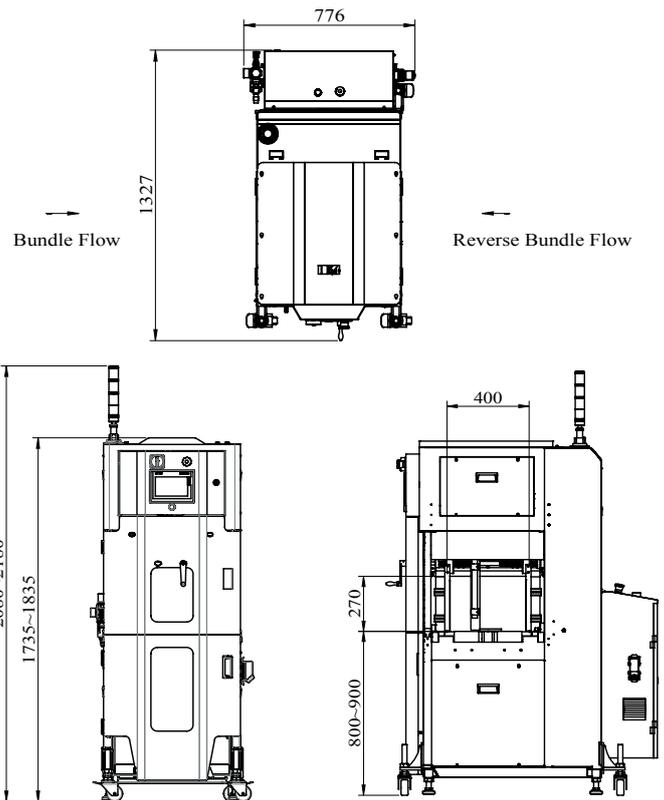

TP-702MGZ TECHNICAL DATA

Capacity: up to 42 bundle/minute
(single strapping)

Bundle Size:

	<u>max.</u>	<u>min.</u>
Width	330mm	130mm
Length	380mm	180mm
Height	250mm	7mm

Bundle Weight: max. 25 kg

Strap Width: 5 mm, 6 mm or 9mm P.P. strap

Strap Tension: 1-32 kg

Strap Coil: 200 mm (150 mm optional)

Electrical Requirements:

220V, 380V, 400V 50/60Hz 3Phase

Full Strap srl

V. Delle Industrie, 11 Vigliano Biellese 13856 (BI) Italy

Tel. +39 015 3353310 Fax +39 015 3353313 Mail: info@fullstrap.com www.fullstrap.com