
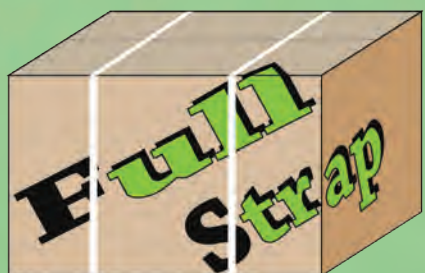


[www.strap-it.it](http://www.strap-it.it)

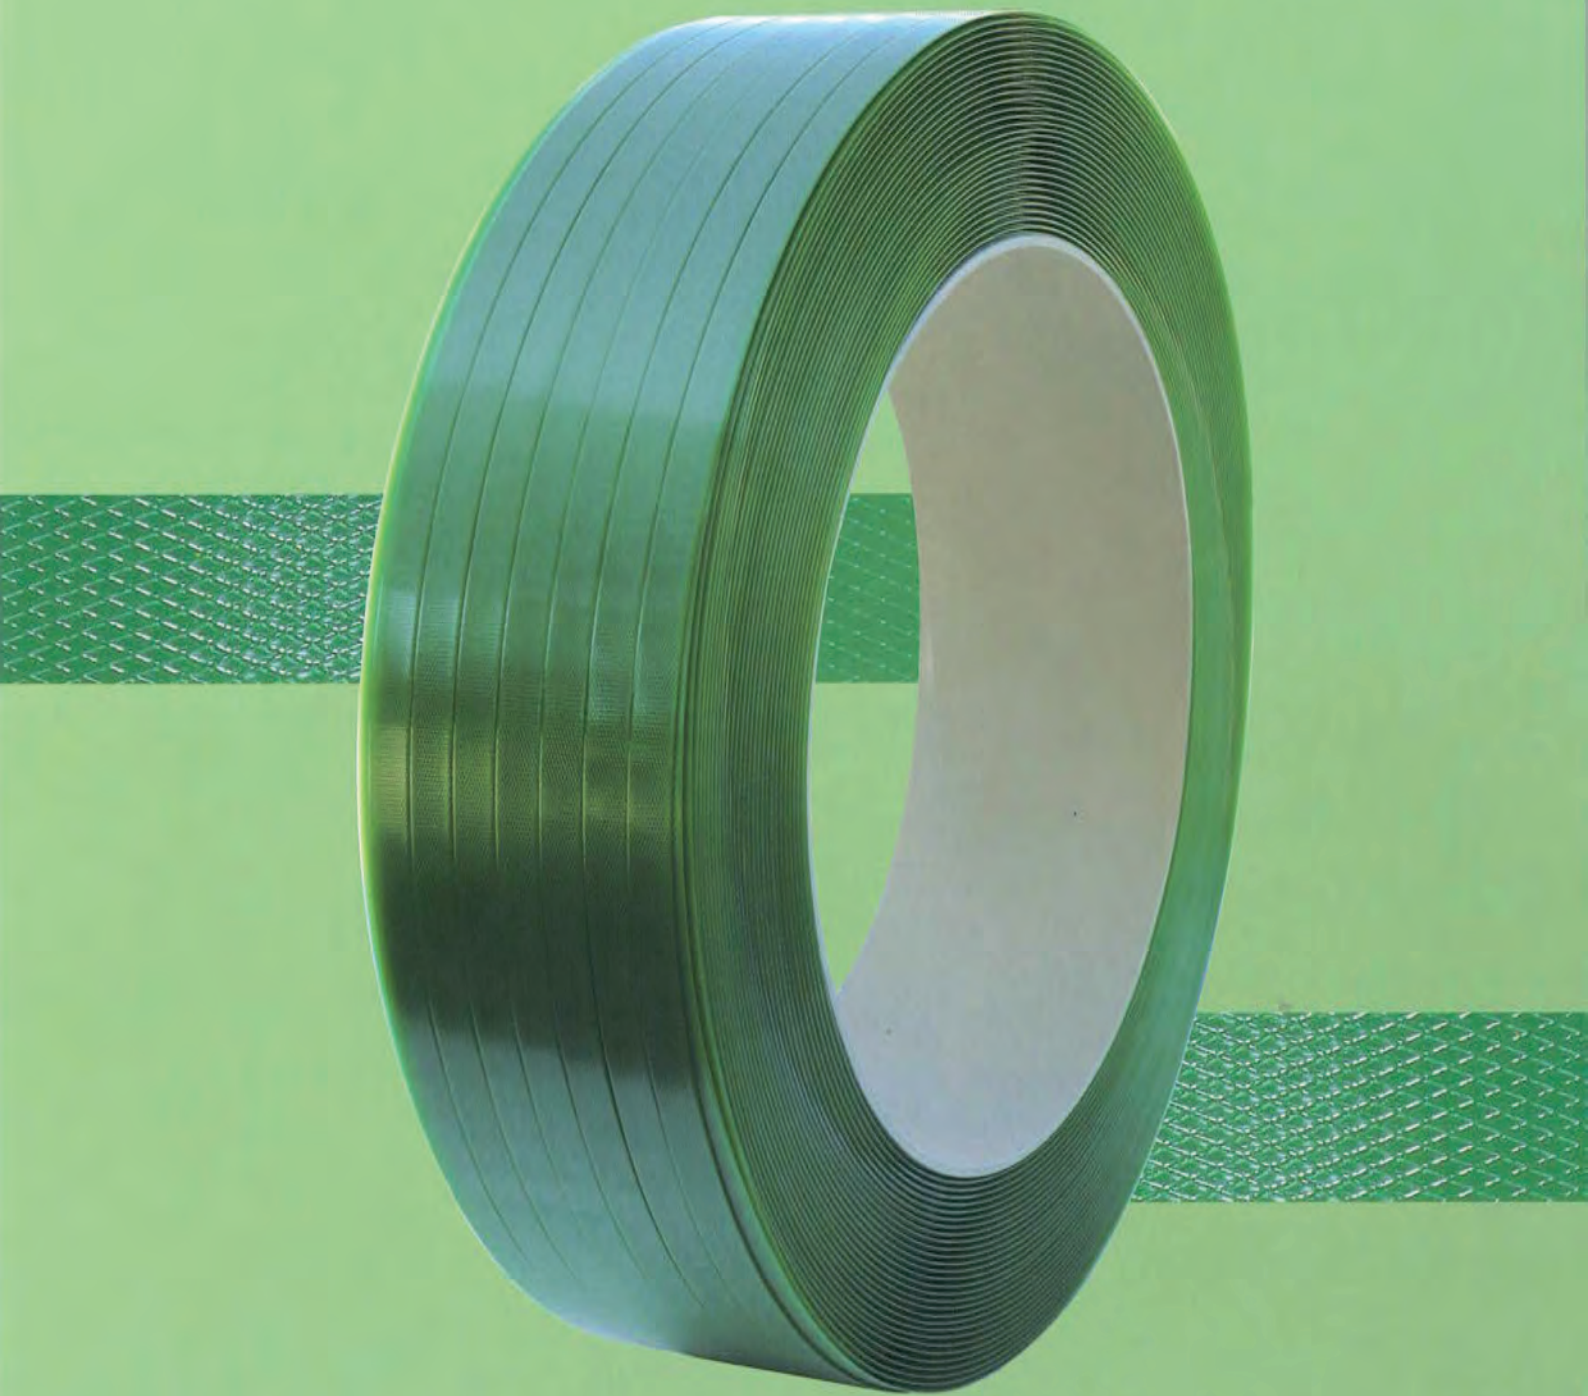

**Full Strap**

# WWW.STRAP-IT.IT

## POLYESTER STRAP - STANDARD LENGTH PER ROLL

SIZE	Resistance Kg	K 406 mm
9,5 x 0,60	207	3000
12,5 x 0,50	230	2500
12 x 0,60	270	2500
12 x 0,65	280	2500
11 x 0,70	290	2400
12 x 0,70	330	2000
15 x 0,60	330	2000
15 x 0,70	380	1750
15,5 x 0,60	345	2000
15,5 x 0,70	420	1750
16 x 0,80	490	1500
16 x 0,95	590	1250
16 x 1,00	630	1200
19 x 0,70	560	1250
19 x 0,80	600	1250
19 x 0,90	670	1000
19 x 1,00	740	1000

SURFACE IS EMBOSSED. PLAIN SURFACE AND ANTISPLIT ADDITIVE ON REQUEST.  
SUPERFICIE GOFFRATA. SUPERFICIE LISCIA E PRODOTTO ADDITTIVATO CON ANTISPLIT SOLO SU RICHIESTA.  
OTHER SIZES AND LENGTHS ON REQUEST  
ALTRE MISURE E LUNGHEZZE SU RICHIESTA.

### DATI TECNICI

**MATERIALE IMPIEGATO:**

poliestere (PET)

**PESO SPECIFICO:**

1,38 g/cm<sup>3</sup>

**CARICO DI ROTTURA:**

40 - 50 Kg/mm<sup>2</sup>

**ALLUNGAMENTO:**

10 -15%

Tolleranza su tutti i dati riportati:±5%

**COLORE STANDARD:**

verde



## Full Strap

Advanced Strapping Systems

**Full strap srl**

Via delle Industrie 11 - 13856 Vigliano Biellese (BI)

Tel. +39 015 3353310 - Fax +39 015 3353313

info@fullstrap.com - www.fullstrap.com

P.Iva/C.F. 02575380023

### TECHNICAL DATA

**USED MATERIAL:**

polyester (PET)

**SPECIFIC GRAVITY:**

1,38 g/cm<sup>3</sup>

**BREAKING LOAD:**

40 - 50 Kg/mm<sup>2</sup>

**ELONGATION:**

10 -15%

Tolerance on all the mentioned data:±5%

**STANDARD COLOUR:**

green